


**SPK 4x2.50 mm<sup>2</sup> speaker (54025)**

High flexible speaker cable for power amplifiers up to 4000 watts standard application. Bi-wiring recommended up to 2x 1000 watts. Round and flexible construction.

same cable available with FRNC Material: 54225

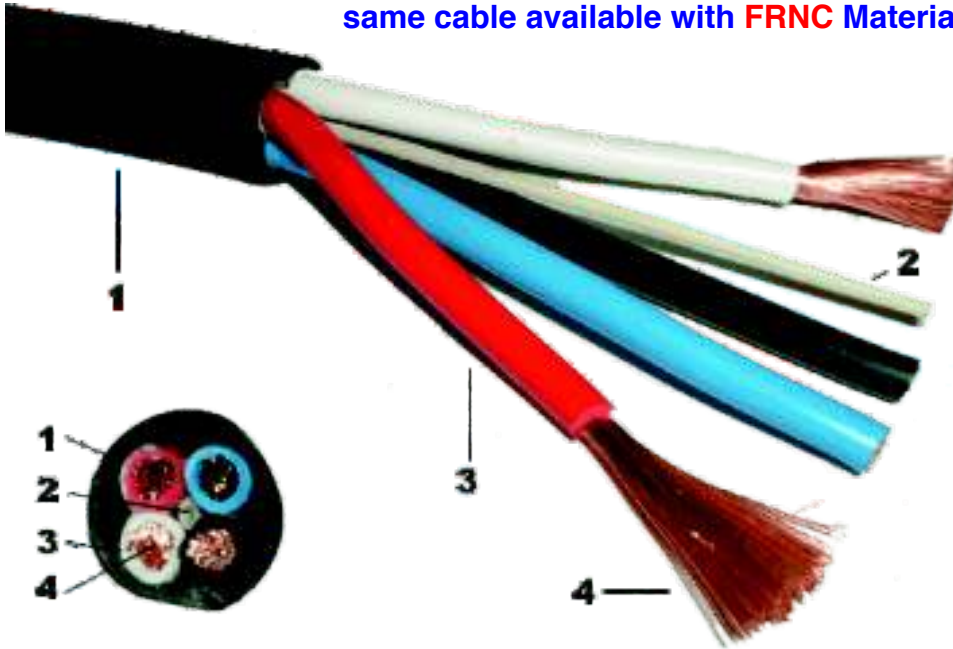

1	Jacket	PVC, ø 9.6 mm, black
2	Filling material	
3	Insulation	PVC, ø 3.2 mm, black, red, blue and white
4	Conductor	Stranded bare copper wires, 140 x 0.15 mm (2.47 mm <sup>2</sup> )

Conductor resistance	< 7.3 Ohm /km	Test voltage cond/cond	2000 V eff.
Capacitance cond/cond	< 115 nF /km	Temperature range (flex)	- 5° to +50° C
Insulation resistance	> 200 MOhm /km	Temperature range (fix)	-30° to +70° C
		Bending radius min.	5x overall diam.

Order No.	Type	ø mm	Color	Spool Size	Weight /Spool	Shipping Unit
54025	SPK 4x2.50 mm <sup>2</sup>	9.6	black	200 m	33.8 kg	1 x 200 m

construction

specifications

ordering data